

TRILO[®]



Trilo VCU 240



Trilo VCU 240 Verticut

The Trilo VCU 240 Verticutter unit is specially designed for sports fields, flat areas and parks. It is the solution for all your thatch problems.

- Removes thatch build-up
- Allows increased aeration
- More effective utilization of fertilizer
- Increased water penetration
- Earlier spring green-up



The natural growth rate of grass slows down when a thatch of leaves, old grass clippings, dead roots and moss has built up. That will lead to reduced resistance against diseases and therefore increased vulnerability and growth problems.



The machine drive is completely mechanical, so it has no hydraulic hoses and cannot leak. The VCU 240 has a working width of 2.40 meters and is constructed on a single rigid frame. This verticutter can handle thatch build-ups right down to 40 mm without any problem. The verticut blades each have 5 teeth, resulting in longer life. As standard, the machine is equipped with 3 mm thick blades with 30 mm spacing. The working depth is adjustable by means of a stepless adjuster on the left and right sides, which moves the front roller against the verticut blades.



Technical Specifications

| | | | |
|------------------|------------|------------------|----------|
| Working width: | 240 cm | Number blades: | 80 |
| Height: | 77 cm | Diameter blades: | Ø 270 mm |
| Length: | 66 cm | Blade thickness: | 3 mm |
| Transport width: | 265 cm | Blade spacing: | 30 mm |
| Weight: | 430 kg | Cat: | I - II |
| Front roller: | Ø 120 mm | Hp requirement: | > 18 kW |
| Working depth: | 40 mm max. | | > 25 Hp |
| P.T.O.: | 540 rpm | | |

Weight kit including four weights of 22 kg each.

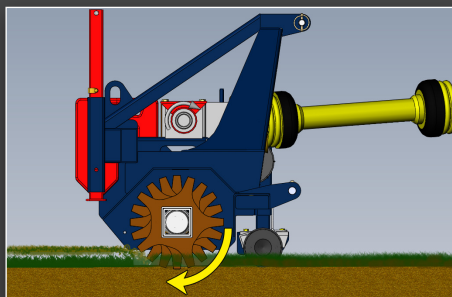

Vanmac
 Astronaut 40
 NL - 3824 MJ Amersfoort
 Tel.: (+31) (0)33 456 45 50
 Fax: (+31) (0)33 456 44 33
 E-mail: sales@trilo.com
 Internet: www.trilo.com