




## Trilo VCMK 3

- Verticutters

[www.trilo.com](http://www.trilo.com)

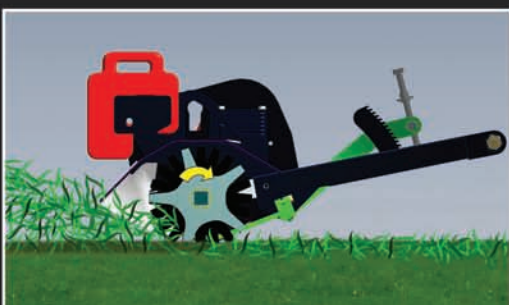

## TRILO VCMK 3 flexible VERTICUT

The Trilo VCMK 3 flexible verticut is specially designed for fairways and undulating areas. The VCMK 3 is the solution for your thatch problem.

**Features**

- Removes thatch build-up
- Allows increased aeration
- More effective utilization of fertilizer
- Increased water penetration
- Earlier spring green-up
- Reduced irrigation costs due to better water utilization

The natural growth rate of grass slows down when a thatch of leaves, old grass clippings, dead roots and moss has built up. It leads to reduced resistance against diseases and therefore increased vulnerability and growth problems.


The Trilo VCMK 3 flexible verticutter is available as a three point linkage unit as well as in combination with a Trilo Vacuum Sweeper. The Trilo VCMK 3 is available in a working width of 1.7 and 2 metres. The machine is designed to work in undulating terrain like fairways, parks and recreation areas. The Trilo VCMK 3 can handle thatch build-ups right down to 40 mm without any problem. The verticut blades each have 5 teeth, resulting in longer life. As standard, the machine is equipped with 3 mm thick blades with 30 mm blade spacing. The working depth is adjustable by way of a stepless adjuster on the left and right sides, which move the castor wheels and the skids versus the verticut rotor.

### Technical Specifications:

VCMK 3 - 170		VCMK 3 - 200	
Working width:	1.70 m	Working width:	2.00 m
Height:	0.90 m	Height:	0.90 m
Length:	1.24 m	Length:	1.24 m
Transport width:	2.10 m	Transport width:	2.40 m
Weight:	320 kg	Weight:	350 kg
PTO:	540 rpm	PTO:	540 rpm
Number of blades:	52	Number of blades:	60
Blade diameter:	Ø 270 mm	Blade diameter:	Ø 270 mm
Blade spacing:	30 mm	Blade spacing:	30 mm
Blade thickness:	3 mm	Blade thickness:	3 mm
Working depth:	max. 40 mm	Working depth:	max. 40 mm

**Options:**

- Blade spacing from 45 mm
- Blade thickness from 2 mm (Tungsten tip)



**Vanmac**  
 Astronaut 40  
 NL - 3824 MJ Amersfoort  
 Tel.: (+31) (0)33 456 45 50  
 Fax.: (+31) (0)33 456 44 33  
 Internet: [www.trilo.com](http://www.trilo.com)